


U. S. A. SAFETY DOMES
7141 LAFAYETTE ST.
DENVER, CO. 80229
800-540-9277

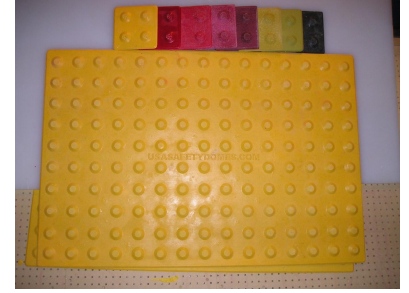

A FIVE YEAR WARRANTY!!

COMPARATIVE MARKET ANALYSIS:

**THERE IS MORE TO CONSIDER OTHER THEN PRICE WHEN LOOKING AT
U. S. A. SAFETY DOMES**

I. In Concrete Installation (Price: \$29.00 per sq. ft.)

1. Very little time is used to install. (is installed when concrete is poured)
2. No additional concrete is needed in substrate. (mats are .6" thick)
3. No additionally time of going back to install mats. (a one step process)
4. Quality of product.
 - a. Domes are larger. (1.4" in diameter which meets the ADA requirement)
 - b. Mats a over 4 times harder then concrete.
 - c. Mats all have a 30 degree elevation allowing snow plows to glide over the top.
(Tests have proven these mats are the answer for cold weather)
 - d. Mats all with the 30 degree elevation will allow wheelchairs to ride over the domes more easily.
5. Safety factor.
 - a. With the 30 degree elevation on the domes, we have lessened the amount of tripping that can be caused by the other truncated domes (they normally are half sphere domes)
 - b. Skid resistance. (Tests show a skid resistance of over 1.0 and with the amount of crushed glass and glass beads throughout the entire mat, the skid resistance should continue for the life of the mats.
6. Colors. A verity of colors are available. (because our product is made from MMA, we use the same pigment bases that are used in automobile paint.)
7. Hot or Cold Weather.
 - a. Hot Weather. Because the mats attach to the concrete substrate, as the heat of the mats increase, this heat is also transferred into the concrete.
 - b. Cold Weather. Mats have been tested in temperatures of – 50 degrees with no effect on the mats.

II. Surface Mounted Mats Installation. (Price; \$26.00 sq. ft..)

1. Price includes: Primer-Sealer, Bonding Agent, All Mechanical Fasteners, (everything needed to install)
2. Installs in about 20 minutes.
3. No barricades are needed after installation (as soon as you pickup your tools, mats are ready for foot traffic)
4. All elevations are at 30 degrees.
5. The same properties that are stated in the above [1. In Concrete Installation] 3. thru 7. apply to Surface Mounted Mats, as stated above.
6. Mats can be installed with or without mechanical fasteners. (see instructions)

ADDITIONAL MATERIAL IS AVAILABLE UPON REQUEST.

1-800-540-9277